

---

# Sikasil® C

---

## DECLARATION OF PERFORMANCE

### No. 85547911

---

1	<b>UNIQUE IDENTIFICATION CODE OF THE PRODUCT-TYPE:</b>	85547911
2	<b>INTENDED USE/S</b>	EN 15651-1:2012 Sealants for exterior and interior application F EXT-INT CC
3	<b>MANUFACTURER:</b>	Sika Services AG Tüffenwies 16-22 8064 Zürich
4	<b>AUTHORISED REPRESENTATIVE:</b>	
5	<b>SYSTEM/S OF AVCP:</b>	System 3
6a	<b>HARMONISED STANDARD:</b>	EN 15651-1:2012
	Notified body/ies:	1213

#### Declaration of Performance

Sikasil® C

85547911

2017.10 , ver. 1

1104

**7 DECLARED PERFORMANCE/S**


Essential Characteristics	Performance	AVCP	Harmonised Technical Specification
Reaction to fire	Class E	System 3	
Release of chemicals dangerous to the environment and health	NPD		
Water tightness and air tightness			
Resistance to flow	≤ 3 mm	System 3	
Loss of volume	≤ 10 %	System 3	
Tensile properties at maintained extension after water immersion (elastic)	NF at 100 % elongation	System 3	EN 15651-1:2012
Tensile properties (i.e. secant modulus) for non-structural low modulus sealants used in joints in cold climate areas (-30°C)	≤ 0,9 MPa at 100 % elongation	System 3	
Tensile properties for non-structural sealants used in joints in cold climate areas (-30°C)	NF at 100 % elongation	System 3	
Durability	Pass	System 3	

**8 APPROPRIATE TECHNICAL DOCUMENTATION AND/OR - SPECIFIC TECHNICAL DOCUMENTATION**

The performance of the product identified above is in conformity with the set of declared performance/s. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.


Signed for and on behalf of the manufacturer by:

Name : Anders Beier  
Function: General Manager  
At Farum on 12 November 2019



.....

Name : Kristian Larsen  
Function: Head Sealing and Bonding  
At Farum on 12 November 2019

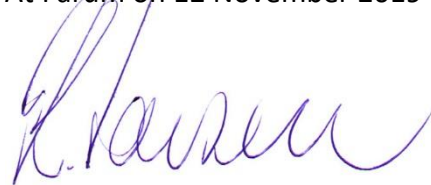

.....

End of information as required by Regulation (EU) No 305/2011

**Declaration of Performance**

Sikasil® C  
85547911  
2017.10 , ver. 1  
1104

## RELATED DECLARATION OF PERFORMANCE

Product Name	Harmonised technical specification	DoP Number
Sikasil® C	EN 15651-2:2012	77886887
Sikasil® C	EN 15651-3:2012	30189649
Sikasil® C	EN 15651-1:2012, EN 15651-2:2012, EN 15651-3:2012	0205040335000000011104

### Declaration of Performance

Sikasil® C  
85547911  
2017.10 , ver. 1  
1104



14

Sika Services AG, Zurich, Switzerland

DoP No. 85547911

EN 15651-1:2012

Notified Body 1213

Sealants for exterior and interior application F EXT-INT CC

Reaction to fire	Class E
Water tightness and air tightness	
Resistance to flow	$\leq 3$ mm
Loss of volume	$\leq 10$ %
Tensile properties at maintained extension after water immersion (elastic)	NF at 100 % elongation
Tensile properties (i.e. secant modulus) for non-structural low modulus sealants used in joints in cold climate areas (-30°C)	$\leq 0,9$ MPa at 100 % elongation
Tensile properties for non-structural sealants used in joints in cold climate areas (-30°C)	NF at 100 % elongation
Durability	Pass

<http://dop.sika.com>

## ECOLOGY, HEALTH AND SAFETY INFORMATION (REACH)

For information and advice on the safe handling, storage and disposal of chemical products, users shall refer to the most recent Safety Data Sheet (SDS) containing physical, ecological, toxicological and other safety related data.

### Declaration of Performance

Sikasil® C

85547911

2017.10 , ver. 1

1104

4/5

**BUILDING TRUST**



---

## LEGAL NOTE

Any information or suggestions for use concerning Sika's products, which we either in writing or orally have given buyers or endusers of the product have been given in good faith based on our own experiences and based of approved praxis and the technological and scientific knowledge on the time of giving such suggestions and information, which are given without any type of guarantees, and which do not lead to any further responsibility from Sika Danmark A/S, besides what is stated in the sales agreement in question. The buyer or end-user should themselves investigate or otherwise make sure that our products are suitable for the use in question and further make sure that the products are kept and used correct and in agreement with the published rules and considering the actual conditions in order to avoid damages or less satisfactory results. Any order is accepted and any deliverance is affected according to the general terms of sales and delivery from Sika Danmark A/S, which are considered known and accepted, and which could be handed out when asked for. Our catalogues are not up-dated automatically. The present product data sheet is only for use in Denmark. Values stated in the present product data sheet should be seen as recommended, unless stated otherwise.

---

**Sika Danmark A/S**  
Hirsemarken 5  
3520 Farum  
Denmark  
[www.sika.dk](http://www.sika.dk)

### Declaration of Performance

Sikasil® C  
85547911  
2017.10 , ver. 1  
1104