

Sika® Injection-203

DECLARATION OF PERFORMANCE

No. 57838186

1	UNIQUE IDENTIFICATION CODE OF THE PRODUCT-TYPE:	57838186
2	INTENDED USE/S	EN 1504-5:2004 Construction products: Concrete injection for ductile filling of cracks, voids and interstices (D). Intended use: In buildings and civil engineering works U(D1)W(2)(1/2/3)(5/30)
3	MANUFACTURER:	Sika Services AG Tüffenwies 16-22 8064, Zürich Switzerland
4	AUTHORISED REPRESENTATIVE:	
5	SYSTEM/S OF AVCP:	System 2+
6a	HARMONISED STANDARD:	EN 1504-5:2004
	Notified body/ies:	0761

Declaration of Performance

Sika® Injection-203

57838186

2019.10 , ver. 3

1063

7 DECLARED PERFORMANCE/S

Essential Characteristics	Performance	AVCP	Harmonised Technical Specification
Adhesion capacity	approx 0.6 N/mm ²	System 2+	EN 1504-5:2004
Elongation capacity	>10%	System 2+	
Watertightness	2 x 10 ⁵ Pa	System 2+	
Glass transition temperature	< - 40°C	System 2+	
Workability: Injectability into dry medium	Injectability class: 0.2 and 0.3 mm	System 2+	
Workability: Injectability into non dry medium	Injectability class: 0.2 and 0.3 mm	System 2+	
Durability	Lost deformation work < 20%	System 2+	
Corrosion behaviour	deemed to have no corrosive effect	System 2+	
Release of dangerous substances	NPD	System 2+	


8 APPROPRIATE TECHNICAL DOCUMENTATION AND/OR - SPECIFIC TECHNICAL DOCUMENTATION

The performance of the product identified above is in conformity with the set of declared performance/s. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.

Signed for and on behalf of the manufacturer by:

Name : Anders Beier
Function: General Manager
Farum on 07 April 2020

Name : Henrik Trangbæk
Function: Head Concrete and Waterproofing
Farum on 07 April 2020

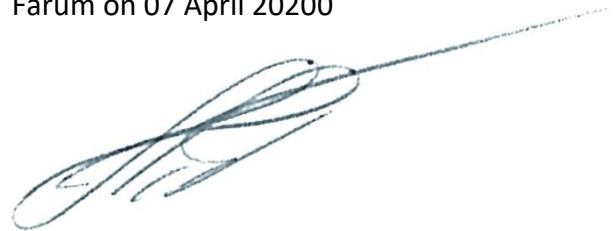

End of information as required by Regulation (EU) No 305/2011

Declaration of Performance

Sika® Injection-203
57838186
2019.10 , ver. 3
1063



08

57838186

Sika Services AG, Zurich, Switzerland

EN 1504-5:2004

Notified Body 0761

Construction products: Concrete injection for ductile filling of cracks, voids and interstices (D).
Intended use: In buildings and civil engineering works
U(D1)W(2)(1/2/3)(5/30)

Adhesion capacity	approx 0.6 N/mm ²
Elongation capacity	>10%
Watertightness	2 x 10 ⁵ Pa
Glass transition temperature	< - 40°C
Workability: Injectability into dry medium	Injectability class: 0.2 and 0.3 mm
Workability: Injectability into non dry medium	Injectability class: 0.2 and 0.3 mm
Durability	Lost deformation work < 20%
Corrosion behaviour	deemed to have no corrosive effect

<http://dop.sika.com>

ECOLOGY, HEALTH AND SAFETY INFORMATION (REACH)

For information and advice on the safe handling, storage and disposal of chemical products, users shall refer to the most recent Safety Data Sheet (SDS) containing physical, ecological, toxicological and other safety related data.

LEGAL NOTE

Any information or suggestions for use concerning Sika's products, which we either in writing or orally have given buyers or end-users of the product have been given in good faith based on our own experiences and based on approved praxis and the technological and scientific knowledge on the time of giving such suggestions and information, which are given without any type of guarantees, and which do not lead to any further responsibility from Sika Danmark A/S, besides what is stated in the sales agreement in question. The buyer or end-user should themselves investigate or otherwise make sure that our products are suitable for the use in question and further make sure that the products are kept and used correct and in agreement with the published rules and considering the actual conditions in order to avoid damages or less satisfactory results. Any order is accepted and any deliverance is affected according to the general terms of sales and delivery from Sika Danmark A/S, which are considered known and accepted, and which could be handed out when asked for. Our catalogues are not up-dated automatically. The present product data sheet is only for use in Denmark. Values stated in the present product data sheet should be seen as recommended, unless stated otherwise.

Declaration of Performance

Sika® Injection-203

57838186

2019.10 , ver. 3

1063

3/4

BUILDING TRUST



Sika Danmark A/S
Hirsemarken 5
3520 Farum
Denmark
www.sika.dk

Declaration of Performance
Sika® Injection-203
57838186
2019.10 , ver. 3
1063

4/4

BUILDING TRUST

