
Sikaflex[®] PRO-3

DECLARATION OF PERFORMANCE

No. 55290532

1	UNIQUE IDENTIFICATION CODE OF THE PRODUCT-TYPE:	55290532
2	INTENDED USE/S	EN 14188-2:2004 Cold applied joint sealants intended for use on roads, airfields, bridge decks and parking decks
3	MANUFACTURER:	Sika Services AG Tüffenwies 16-22 8064 Zürich
4	AUTHORISED REPRESENTATIVE:	
5	SYSTEM/S OF AVCP:	System 4
6a	HARMONISED STANDARD:	EN 14188-2:2004
	Notified body/ies:	1213

Declaration of Performance

Sikaflex[®] PRO-3
55290532
2018.12 , ver. 2
1003, 1009

7 DECLARED PERFORMANCE/S

Essential Characteristics	Performance	AVCP	Harmonised Technical Specification
Bonding strength	NPD	System 4	EN 14188-2:2004
Cohesion	NPD	System 4	
Watertightness	NPD	System 4	
Resistance to deformation:			
Loss of volume	≤5 %	System 4	
Elastic recovery	≥ 70 %	System 4	
Durability of watertightness against chemicals	≤ 50 %	System 4	
Durability of cohesion against liquid chemicals	Pass	System 4	
Durability of all mandated characteristics against ageing	Change of tensile modulus at 100 % extension ≤ ±20 %	System 4	
Resistance to flame	NPD	System 4	


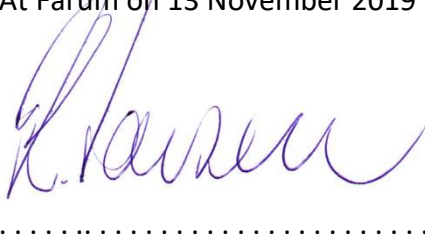
8 APPROPRIATE TECHNICAL DOCUMENTATION AND/OR - SPECIFIC TECHNICAL DOCUMENTATION

The performance of the product identified above is in conformity with the set of declared performance/s. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.

Signed for and on behalf of the manufacturer by:

Name : Anders Beier
 Function: General Manager
 At Farum on 13 November 2019

Name : Kristian Larsen
 Function: Head Sealing and Bonding
 At Farum on 13 November 2019

End of information as required by Regulation (EU) No 305/2011

RELATED DECLARATION OF PERFORMANCE

Product Name	Harmonised technical specification	DoP Number
Sikaflex® PRO-3	EN 15651-4:2012	86165593

Declaration of Performance

Sikaflex® PRO-3
 55290532
 2018.12 , ver. 2
 1003, 1009





18

Sika Services AG, Zurich, Switzerland

DoP No. 55290532

EN 14188-2:2004

Notified Body 1213

Cold applied joint sealants intended for use on roads, airfields, bridge decks and parking decks

Resistance to deformation:

Loss of volume	≤5 %
Elastic recovery	≥ 70 %
Durability of watertightness against chemicals	≤ 50 %
Durability of cohesion against liquid chemicals	Pass
Durability of all mandated characteristics against ageing	Change of tensile modulus at 100 % extension ≤ ±20 %

<http://dop.sika.com>

ECOLOGY, HEALTH AND SAFETY INFORMATION (REACH)

For information and advice on the safe handling, storage and disposal of chemical products, users shall refer to the most recent Safety Data Sheet (SDS) containing physical, ecological, toxicological and other safety related data.

LEGAL NOTE

Any information or suggestions for use concerning Sika's products, which we either in writing or orally have given buyers or endusers of the product have been given in good faith based on our own experiences and based of approved praxis and the technological and scientific knowledge on the time of giving such suggestions and information, which are given without any type of guarantees, and which do not lead to any further responsibility from Sika Danmark A/S, besides what is stated in the sales agreement in question. The buyer or end-user should themselves investigate or otherwise make sure that our products are suitable for the use in question and further make sure that the products are kept and used correct and in agreement with the published rules and considering the actual conditions in order to avoid damages or less satisfactory results. Any order is accepted and any deliverance is affected according to the general terms of sales and delivery from Sika Danmark A/S, which are considered known and accepted, and which could be handed out when asked for. Our catalogues are not up-dated automatically. The present product data sheet is only for use in Denmark. Values stated in the present product data sheet should be seen as recommended, unless stated otherwise.

Declaration of Performance

Sikaflex® PRO-3
55290532
2018.12 , ver. 2
1003, 1009

3/4

BUILDING TRUST



Sika Danmark A/S
Hirsemarken 5
3520 Farum
Denmark
www.sika.dk

Declaration of Performance
Sikaflex® PRO-3
55290532
2018.12 , ver. 2
1003, 1009

4/4

BUILDING TRUST

