

SYSTEM DATA SHEET

Sikafloor® MultiFlex PS-27 ESD

SEAMLESS, SMOOTH, LOW VOC, TOUGH ELASTIC ESD POLYURETHANE FLOOR COVERING

DESCRIPTION

The Sikafloor® MultiFlex PS-27 ESD system is a seamless, smooth, low voc, polyurethane, coloured, matt ESD floor covering. It consist out of the two part, self-smoothing, polyurethane coating Sikafloor®-327 and the two part, water dispersed, coloured ESD polyurethane roller coating Sikafloor®-305 W ESD.

USES

Sikafloor® MultiFlex PS-27 ESD may only be used by experienced professionals.

It is used as:

- Dissipative coloured indoor system for electrostatic protected areas (EPA).
- Particularly suitable for areas with requirements for the lowest electrostatic charge (low BVG (Body Voltage Generation)) and dissipative surface
- Typical applications include clean rooms in the electronics industry, microbiology/microchemistry sectors, production plants in the automobile industry etc.

CHARACTERISTICS / ADVANTAGES

- Very low VOC emissions
- Water based
- Easy to apply
- Easy to refurbish, can be overcoated directly with itself
- Low odour
- Good UV resistance, non-yellowing
- Easy to clean
- Conforms to the requirements of ANSI/ESD S20.20 and IEC 61340-5-1
- Matt surface
- Suitable as floor covering acc. DIN VDE 0100-410 / T610 as top coat of non-conductive Sikafloor® products

APPROVALS / CERTIFICATES


- Synthetic resin screed material according to EN 13813:2002, Declaration of Performance and provided with the CE mark
- Coating for surface protection of concrete according to EN 1504-2:2004, Declaration of Performance and provided with the CE mark
- Test of floors regarding ESD-protective properties, SP-Technical Research Institute of Sweden, Report No. 5F005664:A and No. 5F005664:B
- Approval for ESD products according to IEC 61340, SP-Technical Research Institute of Sweden, No. 230-15-0020, rev 1
- Varnishability test acc. to VW-standard PV 3.10.7, Report No. 14-04-14201871-19
- Slip resistance test acc. DIN 51130, Report No. 020143-15-10, Test Institute Roxeler
- Fire classification acc. to DIN EN 13501-1, Test reports KB-Hoch-150461-2, Test Institute Hoch, DE-Fladungen
- Fire classification acc. to DIN EN ISO 9239-1, Test reports KB-Hoch-150460-2, Test Institute Hoch, DE-Fladungen
- Fire classification acc. to DIN EN 11925-2, Test reports KB-Hoch-150459-2, Test Institute Hoch DE-Fladungen
- Test of the Insulation Resistance acc. DIN VDE 0100-410/T610. Test Report P 9915-E, Kiwa-Polymer Institut
- Outgassing emission certificate Sikafloor-305 W ESD: CSM Statement of Qualification - ISO 14644-8, class - 9.6 - Report No. SI 1506-767, Fraunhofer IPA
- Biological Resistance in accordance with ISO 846, CSM Report No. SI 1506-767, Fraunhofer IPA

PRODUCT INFORMATION

Packaging	Please refer to individual Product Data Sheet.
Shelf life	Please refer to individual Product Data Sheet.
Storage conditions	Please refer to individual Product Data Sheet.

SYSTEMS

System Structure **Sikafloor® MultiFlex PS-27 ESD:**

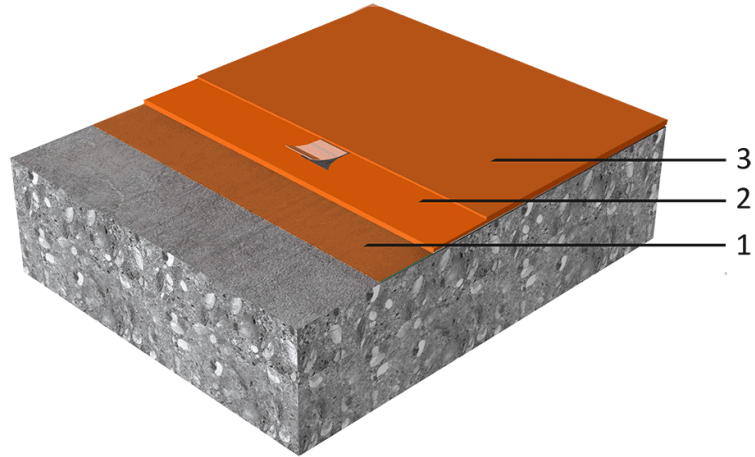

1. Primer	Sikafloor®-156/-160/-161
2- Base coat + Earthing connection	Sikafloor®-327 + Sika® Earthing Kit
3. Final conductive coating	Sikafloor®-305 W ESD

The system configuration as described must be fully complied with and may not be changed.

Composition	PUR
Appearance	Matt
Colour	Available in a limited number of colour shades such as RAL 1000, 1001, 1002, 1011, 3012, 5024, 6021, 6024, 7032, 7035, 7038, 7040, 7042, 7044, 7047, 9018. Be aware that the colour of the layer below has to be approx. adjusted to the colour of the Sikafloor®-305 W ESD.
Nominal Thickness	~ 1.5 - 2.0 mm
Volatile organic compound (VOC) content	Very low content of volatile organic compounds. Sikafloor®-305 W ESD, the finishing layer of the Sikafloor® MultiFlex PS-27 ESD System, has been awarded the Fraunhofer IPA CSM Certificate of Qualification with the report number SI 1506-767. The Outgassing test was performed in accordance with CSM procedures. TVOC: ISO-AMC Class -9.6 (see ISO 14644-8).

TECHNICAL INFORMATION

Tensile Adhesion Strength	> 1.5 N/mm ²	(ISO 4624)
Reaction to Fire	Bfl - s1	(EN 13501-1)
Chemical Resistance	Resistant to many chemicals. Contact Sika technical service for specific information.	
Temperature Resistance	Exposure*	Dry heat
	Permanent	+50 °C
	Short-term max. 7 d	+80 °C
	Short-term moist/wet heat* up to +80 °C where exposure is only occasional (i.e. during steam cleaning etc.) *No simultaneous chemical and mechanical exposure.	

USGBC LEED Rating

Sikafloor®-305 W ESD conforms to the requirements of LEED EQ Credit 4.2: Low-Emitting Materials: Paints & Coatings. Reference Test Method 304: VOC Content < 100 g/l

Skid / Slip Resistance	R 11	(DIN 51130)
Electrostatic Behaviour	Resistance to ground ¹	$R_g < 10^9 \Omega$ (IEC 61340-4-1)
	Typical average resistance to ground ²	$R_g < 10^5 - 10^6 \Omega$ (DIN EN 1081)
	Body voltage generation ²	< 100 V (IEC 61340-4-5)
	System Resistance (Person/Floor/Shoe) ³	< 35 M Ω (IEC 61340-4-5)

¹ In accordance with IEC 61340-5-1 and ANSI/ESD S20.20.

² Readings may vary, depending on ambient conditions (i.e. temperature, humidity) and measurement equipment.

³ Or < 10⁹ Ω + body voltage generation of < 100 V, in case of readings > 35 M Ω .

APPLICATION INFORMATION

Consumption	Coating	Product	Consumption
	Primer	Sikafloor®-156/-160/-161	1-2 x ~ 0.3 - 0.5 kg/m ²
	Levelling (if required)	Sikafloor®-156/-160/-161 levelling mortar	Refer to PDS of Sikafloor®-156/-160/-161
	Base coat	Sikafloor®-327	~ 2.1 kg/m ² (1.5 mm)
	Earthing connection	Sika® Earthing Kit	1 earthing point per approx. 200 -300 m ² , min. 2 per room.
	Final conductive coating	Sikafloor®-305 W ESD	1-2 x 0.18 – 0.2 kg/m ² /layer

These figures are theoretical and do not allow for any additional material due to surface porosity, surface profile, variations in level and wastage etc. When used in high wear conditions, e.g. castor chairs, a second layer with Sikafloor®-305 W ESD improves the mechanical properties of the floor covering. Lower consumption can cause roller marks, gloss differences and irregular surface structure, higher consumption result in water retention and can cause pigment floating as well as unsatisfactory conductivity.

Ambient Air Temperature	+10 °C min. / +30 °C max.
Relative Air Humidity	During curing the humidity should not exceed 75 % max. Adequate fresh air ventilation or a dehumidifier must be provided to remove the excess moisture from the curing product.
Dew Point	Beware of condensation! The substrate and uncured floor must be at least 3 °C above dew point to reduce the risk of condensation or blooming on the floor finish.
Substrate Temperature	+10 °C min. / +30 °C max.
Substrate Moisture Content	<4 % pbw moisture content. Test method: Sika Tramex Meter, CM-measurement or Oven-Dry-Method. No rising moisture according to ASTM (Polyethylene-sheet).



Waiting Time / Overcoating

Before applying Sikafloor®-327 on Sikafloor®-156/160/161 allow:

Substrate temperature	Minimum	Maximum
+10°C	24 hours	4 days
+20°C	12 hours	2 days
+30°C	8 hours	1 days

Before applying Sikafloor®-305 W ESD on Sikafloor®-327 allow:

Substrate temperature	Minimum	Maximum
+10°C	24 hours	72 hours
+20°C	12 hours	48 hours
+30°C	6 hours	36 hours

Before applying Sikafloor®-305 W ESD on Sikafloor®-305 W ESD allow:

Substrate temperature	Minimum	Maximum
+10°C	48 hours	10 days
+20°C	24 hours	8 days
+30°C	16 hours	7 days

Times are approximate and will be affected by changing ambient conditions particularly temperature and relative humidity.

Applied Product Ready for Use

Temperature	Foot traffic	Light traffic	Full cure
+10°C	~ 48 hours	~ 5 days	~ 10 days
+20°C	~ 24 hours	~ 3 days	~ 8 days
+30°C	~ 16 hours	~ 2 days	~ 7 days

Note: Times are approximate and will be affected by changing ambient conditions

MAINTENANCE

To maintain the appearance of the floor after application, Sikafloor®-305 W ESD must have all spillages removed immediately and must be regularly cleaned using rotary brush, mechanical scrubbers, scrubber dryer, high pressure washer, wash and vacuum techniques etc. using suitable detergents.

CLEANING

Please refer to the Sikafloor® Cleaning Regime.

FURTHER INFORMATION

Please refer to:

- Sika® Method Statement Mixing and Application of Flooring Systems
- Sika® Method Statement Surface Evaluation & Preparation

IMPORTANT CONSIDERATIONS

- This system may only be used by experienced professionals.
- Epoxy surfaces must be sanded e.g. with a 3M™ Brown Stripper Pad in combination with low speed automatic scrubbers or rotary floor machines (175 – 600 rpm) in order to ensure a proper adhesion of Sikafloor®-305 W ESD.
- The freshly applied final conductive coating of the Sikafloor® MultiFlex PS-27 ESD system must be protected from damp, condensation and water for at least 24 hours.
- Ensure adequate ventilation during application and drying (especially at temperatures < 13°C). Otherwise the reaction and drying processes may be im-

paired.

- Sika does not assume any liability for possible changes in the composition of the recommended cleaning- and maintenance agents and their effects on the floor characteristics.
- If the floor is exposed to mechanical and / or chemical loads, the conductivity must be controlled regularly. In case of wear and tear, the final conductive coating of the Sikafloor® MultiFlex PS-27 ESD system must be refreshed. This must be coordinated with the authorized ESD-representative or comparable.
- Under certain conditions, underfloor heating combined with high point loading, may lead to imprints in the resin.
- If heating is required do not use gas, oil, paraffin or other fossil fuel heaters, these produce large quantities of both CO₂ and H₂O water vapour, which may adversely affect the finish. For heating use only electric powered warm air blower systems.
- For exact colour matching, ensure the final conductive coating of the Sikafloor® MultiFlex PS-27 ESD system in each area is applied from the same control batch numbers.
- ESD clothing, ambient conditions, measurement equipment, cleanliness of the floor and the test person have a substantial influence on the measurement results.
- ESD-footwear must fulfil the requirements of DIN EN 61340-4-3 (Climate 2, resistance < 5 M Ohm).
- Tires might generate dark marks on Sikafloor®-305 W ESD because of plasticizer migration.
- In case of increased demands on the cleanability, Sikafloor®-305 W ESD can be over coated with the static dissipative floor polish "Jontec ESD" or "Jontec Destat" from Diversey Care. Please refer to the cleaning regime of Sikafloor®-305 W ESD.

All measurement values for the Sikafloor® MultiFlex PS-27 ESD system stated in the system data sheet (apart from the ones referring to proof statements) were measured under the following conditions:

Size of ESD-footwear:	42 (EU) (UK: 8; US: 8,5)
Weight test person:	90 kg
Ambient conditions:	+23 °C/50%
Measurement device for the Resistance to Ground:	Metriso 2000 (Warmbier) or comparable
Surface resistance probe:	Carbon Rubber electrode. Weight: 2.50 kg
Rubber pad hardness:	Shore A 60 (± 10)
Measurement device for the System Resistance:	Metriso 2000 (Warmbier) or comparable
Measurement device for the Walking Test:	Walking Test Kit WT 5000 (Warmbier) or comparable

The number of conductivity measurements is strongly recommended to be as shown in the table below:

Ready applied area	Number of measurements
< 10 m ²	6 measurements
< 100 m ²	10-20 measurements
<1000 m ²	50 measurements
<5000 m ²	100 measurements

In case of values lower/higher as required, additional measurements has to be carried out, approx. 30 cm around the point with insufficient readings. If the newly measured values are in accordance with the requirements, the total area is acceptable.

Installation of earthing points: Please refer to the Method Statement: "MIXING & APPLICATION OF FLOORING SYSTEMS".

Numbers of earth connections: Per room at least 2 earthing points. The optimum number of earth connections depends on the local conditions and should be specified using available drawings.

BASIS OF PRODUCT DATA

All technical data stated in this Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

LOCAL RESTRICTIONS

Note that as a result of specific local regulations the declared data and recommended uses for this product may vary from country to country. Consult the local Product Data Sheet for the exact product data and uses.

ECOLOGY, HEALTH AND SAFETY

For information and advice on the safe handling, storage and disposal of chemical products, users shall refer to the most recent Safety Data Sheet (SDS) containing physical, ecological, toxicological and other safety-related data.

LEGAL NOTES

Any information or suggestions for use concerning Sika's products, which we either in writing or orally have given buyers or end-users of the product, have been given in good faith based on our own experiences and based on approved praxis and the technological and scientific knowledge on the time of giving such suggestions and information, which are given without any type of guarantees, and which do not lead to any further responsibility from Sika Danmark A/S, besides what is stated in the sales agreement in question. The buyer or end-user should themselves investigate or otherwise make sure, that our products are suitable for the use in question and further make sure that the products are kept and used correct and in agreement with the published rules and considering the actual conditions in order to avoid damages or less satisfactory results. Any order is accepted and any deliverance is affected according to the general terms of sales and delivery from Sika Danmark A/S, which are considered known and accepted, and which could be handed out when asked for. Our catalogues are not up-dated automatically. The present product data sheet is only for use in Denmark. Values stated in the present product data sheet should be seen as recommended, unless stated otherwise.