

## PRODUCT DATA SHEET

## Sikaflex®-591

Multifunctional sealant for marine applications

## TYPICAL PRODUCT DATA (FURTHER VALUES SEE SAFETY DATA SHEET)

Chemical base	Silane Terminated Polymer
Color (CQP001-1)	White, Black, Grey, Brown
Cure mechanism	Moisture-curing
Density (uncured)	1.5 kg/l
Non-sag properties	Very good
Application temperature	5 – 40 °C
Skin time (CQP019-1)	35 minutes <sup>A</sup>
Open time (CQP526-1)	20 minutes <sup>A</sup>
Curing speed (CQP049-1)	(see diagram)
Shrinkage (CQP014-1)	1 %
Shore A hardness (CQP023-1 / ISO 48-4)	45
Tensile strength (CQP036-1 / ISO 527)	2.2 MPa
Elongation at break (CQP036-1 / ISO 527)	500 %
Tear propagation resistance (CQP045-1 / ISO 34)	15 N/mm
Service temperature (CQP513-1)	-50 – 80 °C
Shelf life	12 months <sup>B</sup>

CQP = Corporate Quality Procedure

<sup>A)</sup> 23 °C / 50 % r. h.<sup>B)</sup> storage below 25 °C

## DESCRIPTION

Sikaflex®-591 is a sealant based on Sika's Silane Terminated Polymer (STP) technology. With its excellent resistance against the harsh maritime weathering conditions it can be used for a wide range of applications. Sikaflex®-591 exceeds common environmental and safety standards and sets a new benchmark from an ecological point of view. Sikaflex®-591 meets the low spread flame requirements (FTP Code Part 5) set out by the International Maritime Organization (IMO).

## PRODUCT BENEFITS


- IMO approved
- Exceeds EH&S standards
- Free of isocyanate, solvents, PVC, phthalates and tin catalysts
- Highly elastic
- Excellent weathering stability
- Very good processing and tooling characteristics
- Bonds well to a wide variety of marine substrates

## AREAS OF APPLICATION

Sikaflex®-591 is a multipurpose sealant designed for marine applications. It is suitable for elastic, vibration-resistant joint seals and for a wide variety of interior and exterior sealing applications. Sikaflex®-591 bonds well to substrates commonly used in the marine industry. Sikaflex®-591 is not suitable for applications with teak wood and plastics that are prone to stress cracking (e.g. PMMA, PC, etc.). This product is suitable for experienced professional users only. Test with actual substrates and conditions have to be performed to ensure adhesion and material compatibility.

## PRODUCT DATA SHEET

Sikaflex®-591

Version 03.01 (04 - 2023), en\_DK  
012201205914001000

## CURE MECHANISM

Sikaflex®-591 cures by reaction with atmospheric moisture. At low temperatures the water content of the air is generally lower and the curing reaction proceeds somewhat slower (see diagram 1).

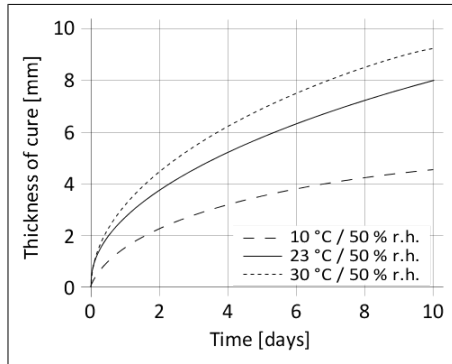


Diagram 1: Curing speed Sikaflex®-591

## CHEMICAL RESISTANCE

Sikaflex®-591 is generally resistant to fresh water, seawater, diluted acids and diluted caustic solutions; temporarily resistant to fuels, mineral oils, vegetable and animal fats and oils; not resistant to organic acids, glycolic alcohol, concentrated mineral acids and caustic solutions or solvents.

## METHOD OF APPLICATION

### Surface preparation

Surfaces must be clean, dry and free from grease, oil and dust.

Surface treatment depends on the specific nature of the substrates and is crucial for a long lasting bond. Suggestions for surface preparation may be found on the current edition of the appropriate Sika® Pre-treatment Chart. Consider that these suggestions are based on experience and have in any case to be verified by tests on original substrates.

### Application

Sikaflex®-591 can be processed between 5 °C and 40 °C but changes in reactivity and application properties have to be considered. The optimum temperature for substrate and sealant is between 15 °C and 25 °C. Sikaflex®-591 can be processed with hand, pneumatic or electric driven piston guns.

In case Sikaflex®-591 could get in contact with polyurethane ensure that those products are cured or wait at least 24 hours prior to seal.

## Tooling and finishing

Tooling and finishing must be carried out within the skin time of the product. It is recommended using Sika® Tooling Agent N. Other finishing agents must be tested for suitability and compatibility prior the use.

## Removal

Uncured Sikaflex®-591 can be removed from tools and equipment with Sika® Remover-208 or another suitable solvent. Once cured, the material can only be removed mechanically. Hands and exposed skin have to be washed immediately using hand wipes such as Sika® Cleaner-350H or a suitable industrial hand cleaner and water. Do not use solvents on skin!

## FURTHER INFORMATION

The information herein is offered for general guidance only. Advice on specific applications is available on request from the Technical Department of Sika Industry.

Copies of the following publications are available on request:

- Safety Data Sheets
- General Guidelines  
Bonding and Sealing with 1-component Sikaflex®
- Sika® Pre-Treatment Chart  
For Sealing and Bonding in Marine Applications

## PACKAGING INFORMATION

Cartridge	300 ml
Unipack*	600 ml

\*Not available in Denmark

## BASIS OF PRODUCT DATA

All technical data stated in this document are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

## HEALTH AND SAFETY INFORMATION

For information and advice regarding transportation, handling, storage and disposal of chemical products, users shall refer to the actual Safety Data Sheets containing physical, ecological, toxicological and other safety-related data.

## DISCLAIMER

Any information or suggestions for use concerning Sika's products, which we either in writing or orally have given buyers or end-users of the product have been given in good faith based on our own experiences and based of approved praxis and the technological and scientific knowledge on the time of giving such suggestions and information, which are given without any type of guarantees, and which do not lead to any further responsibility from Sika Danmark A/S, besides what is stated in the sales agreement in question. The buyer or end-user should themselves investigate or otherwise make sure that our products are suitable for the use in question and further make sure that the products are kept and used correct and in agreement with the published rules and considering the actual conditions in order to avoid damages or less satisfactory results. Any order is accepted and any deliverance is affected according to the general terms of sales and delivery from Sika Danmark A/S, which are considered known and accepted, and which could be handed out when asked for. Our catalogues are not updated automatically. The present product data sheet is only for use in Denmark. Values stated in the present product data sheet should be seen as recommended, unless stated otherwise.

## PRODUCT DATA SHEET

Sikaflex®-591  
Version 03.01 (04 - 2023), en\_DK  
012201205914001000

Sika Danmark A/S  
Hirsemarken 5  
3520 Farum  
Tlf. +45 48 18 85 85  
www.sika.dk

