

## PRODUCT DATA SHEET

# SikaMelt<sup>®</sup>-009 (former SikaMelt<sup>®</sup>-9900)

## CLEANER FOR REACTIVE POLYURETHANE ADHESIVES

### TYPICAL PRODUCT DATA (FURTHER VALUES SEE SAFETY DATA SHEET)

Chemical base	Synthetic resin
Color (CQP001-1)	Blue
Density	0.9 kg/l
Solid content	100 %
Viscosity	at 130 °C 3 500 mPa·s
Application temperature	90 – 150 °C
Shelf life	24 months

#### DESCRIPTION

SikaMelt<sup>®</sup>-009 is a cleaner for reactive polyurethane hot melt application equipment. It works through displacement of the adhesive and a neutralisation of the isocyanate groups.

#### PRODUCT BENEFITS

- Good cleaning performance
- Neutralisation of isocyanate groups
- Fast melting

#### AREAS OF APPLICATION

SikaMelt<sup>®</sup>-009 has both a displacement and neutralising effect. The reactive groups of the polyurethane hot melt react with SikaMelt<sup>®</sup>-009. This prevents further cross-linking of the polyurethane hot melt inside the equipment.

Note: Once the reactive polyurethane hot melt is fully cured, it can only be removed mechanically.

This product is suitable for experienced professional users only.

## METHOD OF APPLICATION

In general the application temperature range is 90 °C – 150 °C. The application machines have first to be emptied. Then SikaMelt®-009 is pumped through the machine until only pure blue particle-free cleaner comes out. When adhesive application starts again, the whole equipment has to be flushed with polyurethane hot melt until no blue coloured hot melt comes out the nozzles anymore. It is recommended to check adhesive purity by adhesion tests. See Manual “Cleaning of application tools for SikaMelt® reactive polyurethane hot melts”.

To meet the required application properties the cleaner viscosity can be adjusted by adapting the application temperature (see diagram 1).

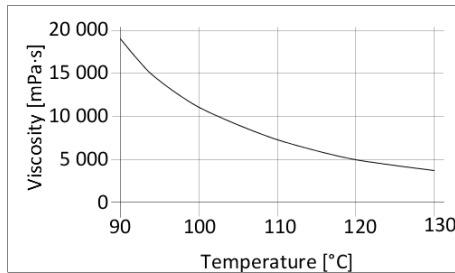


Diagram 1: Viscosity as a function of temperature

## STORAGE CONDITIONS

SikaMelt®-009 has to be stored at temperature below 40 °C in a dry place.

## FURTHER INFORMATION

The information herein is offered for general guidance only. Advice on specific applications is available on request from the Technical Department of Sika Industry.

Copies of the following publications are available on request:

- Safety Data Sheets
  - Cleaning Instruction
- For SikaMelt® PUR reactive hot melt equipment

## PACKAGING INFORMATION

Bag	20 kg
-----	-------

## BASIS OF PRODUCT DATA

All technical data stated in this document are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

## HEALTH AND SAFETY INFORMATION

For information and advice regarding transportation, handling, storage and disposal of chemical products, users shall refer to the actual Safety Data Sheets containing physical, ecological, toxicological and other safety-related data.

## DISCLAIMER

Any information or suggestions for use concerning Sika's products, which we either in writing or orally have given buyers or end-users of the product, have been given in good faith based on our own experiences and based on approved praxis and the technological and scientific knowledge on the time of giving such suggestions and information, which are given without any type of guarantees, and which do not lead to any further responsibility from Sika Danmark A/S, besides what is stated in the sales agreement in question. The buyer or end-user should themselves investigate or otherwise make sure, that our products are suitable for the use in question and further make sure that the products are kept and used correct and in agreement with the published rules and considering the actual conditions in order to avoid damages or less satisfactory results. Any order is accepted and any deliverance is affected according to the general terms of sales and delivery from Sika Danmark A/S, which are considered known and accepted, and which could be handed out when asked for. Our catalogues are not up-dated automatically. The present product data sheet is only for use in Denmark. Values stated in the present product data sheet should be seen as recommended, unless stated otherwise.

## PRODUCT DATA SHEET

SikaMelt®-009  
Version 01.01 (03 - 2020), en\_DK  
019409010090001000

