



EN 15651-1:2012

13

1213

DECLARATION OF PERFORMANCE

Sikacryl[®]-WT

02	35	31	00	001	00030	00	1207
----	----	----	----	-----	-------	----	------

1. Product Type: Unique identification code of the product-type:	EN 15651-1:2012, Type F INT Sikacryl[®] WT
2. Type batch or serial number or any other element allowing identification of the construction product as required under Article 11(4):	See packaging of the product
3. Intended use or uses of the construction product, in accordance with the applicable harmonised technical specification, as foreseen by the manufacturer:	Sealant for facade for interior application
4. Name, registered trade name or registered trade mark and contact address of the manufacturer as required under Article 11(5):	Sika Danmark A/S Hirsemarken 5 DK-3520 Farum
5. Contact Address: Where applicable, name and contact address of the authorized representative whose mandate covers the tasks specified in Article 12(2):	Not relevant
6. AVCP: System or systems of assessment and verification of constancy of performance (AVCP) of the construction product as set out in CPR, Annex V:	System 4 System 3 for reaction to fire
7. Notified body (hEN): In case of the declaration of performance (DoP) concerning a construction product covered by a harmonised standard:	The notified body SKZ Tecona GmbH, identification number 1213, performed the testing of the reaction to fire and issued test report and classification report.
8. Notified body (ETA): In case of the declaration of performance concerning a construction product for which a European Technical Assessment (ETA) has been issued:	Not relevant

Declaration of Performance



Industry
Declaration of Performance
 Identification No. 023531000010003000
Edition 06.2015
Version No. V1

9. Declaration of Performance

Conditioning: Method A
 Substrate: Mortar M2 (no primer)

Essential characteristics	Performance	Harmonised technical specification
Reaction to fire	Class E	EN 15651-1:2012
Release of chemicals dangerous to the environment and health	NPD	
Water tightness and air tightness		
• Resistance to flow	≤ 3 mm	
• Loss of volume	≤ 45 %	
• Tensile properties: elongation at break at 23°C	≥ 25 %	
Durability	pass	


10. Declaration

The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9. This declaration of performance (DoP) is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer by:



Anders Beier
 Head Industry
 Sika Danmark A/S

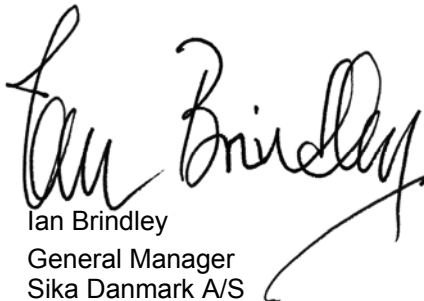

Ian Brindley
 General Manager
 Sika Danmark A/S

June, 2015 Farum

Ecology, Health and Safety Information (REACH)

For information and advice on the safe handling, storage and disposal of chemical products, users shall refer to the most recent Safety Data Sheet (SDS) containing physical, ecological, toxicological and other safety related data.



For further Information
 Sika Danmark A/S
 TM Industry
 Hirsemarken 5
 DK-3520 Farum
 Danmark

Phone +45 18 85 85
 www.sika.dk

Industry
Declaration of Performance
 Identification No.
Edition
Version No.

023531000010003000
06.2015
V1



1213

13

02 35 31 00 001 00030 00

EN 15651-1:2012

Sealant for facade for interior application
 F INT

Conditioning: Method A
 Substrate: Mortar M2 (no primer)

Essential characteristics	Performance
Reaction to fire	Class E
Water tightness and air tightness	
• Resistance to flow	≤ 3 mm
• Loss of volume	≤ 45 %
• Tensile properties: elongation at break at 23°C	≥ 25 %
Durability	Pass

Legal note:

This information is given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.



For further Information
 Sika Danmark A/S
 TM Industry
 Hirsemarken 5
 DK-3520 Farum
 Danmark

Phone +45 18 85 85
 www.sika.dk