

## SYSTEM DATA SHEET

# Sikafloor® MultiFlex PB-57 UV

Polyurethane car park UV decking system

### DESCRIPTION

Sikafloor® MultiFlex PB-57 UV is a polyurethane, coloured, elastic, UV resistant, crack-bridging, slip-resistant car park decking system and is part of the Sikafloor® Multiflex flooring range. It provides a hard wearing, seamless, chemical resistant, low maintenance, slip resistant finish when broadcast with different aggregate grades and sealed with a gloss finish seal coat. Thickness ~4,0 mm. Internal and external use.

### USES

Sikafloor® MultiFlex PB-57 UV may only be used by experienced professionals.

For car park decks:

- UV exposed
- Turning areas

### CHARACTERISTICS / ADVANTAGES

- Waterproof
- High mechanical resistance
- Good chemical resistance
- Good abrasion resistance
- Resistant to UV exposure
- Low dirt pick up
- Easy cleanability
- Seamless
- Slip and skid resistant surface
- Scratch resistant surface
- Easy application
- Low maintenance

### SUSTAINABILITY


- Conformity with LEED v2009 IEQc 4.2: Low-Emitting Materials - Paints and Coatings - Sikafloor®-377

### APPROVALS / CERTIFICATES

- CE Marking and Declaration of Performance to EN 1504-2 - Surface protection product for concrete
- CE Marking and Declaration of Performance to EN 13813 - Resin screed material for internal use in buildings

# SYSTEM INFORMATION

## System structure

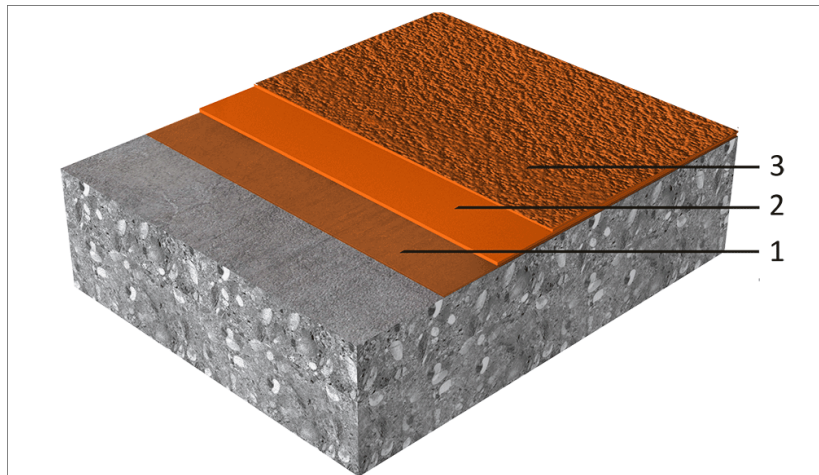

Layer	Product
1. Primer	Sikafloor®-150 /-151 + Aggregate broadcast 0,4–0,8 mm
2. Wearing layer	Sikafloor®-377 + Aggregate broadcast 0,4–0,8 mm
3. Seal / top coat	Sikafloor®-359 N

Composition	Polyurethane
Appearance	Textured, slip resistant, matt finish
Colour	Available colours: ~RAL 7023, 7030, 7032, 7035, 7037,7038, 7040, 7042,9002, 9010 Other colour shades on request. Please contact our customer service, for information of which colors are sold in Denmark.
Nominal thickness	~4 mm

## TECHNICAL INFORMATION

Shore A hardness	~60 (14 days/+23 °C)	(DIN 53505)
Shore D Hardness	~60 (14 days/+23 °C)	(DIN 53505)
Abrasion resistance	<3000 mg (CS10/1000/1000)	(DIN 53109)
Resistance to wearing	AR 0,5	(DIN EN 13813)
Resistance to impact	Class I	(ISO 6272)
Tensile strength	~11 N/mm <sup>2</sup>	(EN 53504)
Tensile adhesion strength	> 1,5 N/mm	(EN 1542)
Reaction to fire	Efl-s1	(EN 13501-1)
Chemical resistance	Sikafloor® MultiFlex PB-57 UV always has to be sealed with Sikafloor®-359 N. Refer to the chemical resistance of Sikafloor®-359 N	
Permeability to water vapour	Class III	(EN ISO 7783-1)
Capillary absorption	w < 0,01 kg/(m <sup>2</sup> x h0,5)	(EN 1062-3)
Permeability to carbon dioxide	Sd ≥ 50 m	(EN 1062-6)
Skid / slip resistance	Class III	(EN 13036-4)

## APPLICATION INFORMATION

SYSTEM DATA SHEET  
Sikafloor® MultiFlex PB-57 UV  
June 2021, Version 01.01  
02081290000000070

Consumption	Layer	Product	Consumption
	1. Primer	Sikafloor®-150/-151 + Aggregate broadcast 0,4–0,8 mm	~0,4 kg/m <sup>2</sup> /layer ~1,0 kg/m <sup>2</sup>
	2. Wearing layer	Sikafloor®-377 (filled with 1:0,4 with quartz sand 0,1–0,3 mm) + Aggregate broadcast 0,4–0,8 mm	~1,35 kg/m <sup>2</sup> (resin) + ~0,55 kg/m <sup>2</sup> (quartz sand) ~6,0–8,0 kg/m <sup>2</sup>
	3. Seal / top coat	Sikafloor®-359 N	~0,7–0,9 kg/m <sup>2</sup> /layer
These figures are theoretical and do not allow for any additional material due to surface porosity, surface profile, variations in level or wastage etc.			
Product temperature	+10 °C min. / +30 °C max.		
Ambient air temperature	+10 °C min. / +30 °C max.		
Relative air humidity	80 % max.		
Dew point	The substrate and uncured floor products must be at least +3 °C above dew point to reduce the risk of condensation or surface damage of the floor finish.		
Substrate temperature	+10 °C min. / +30 °C max.		
Substrate moisture content	≤4 % parts by weight Test method: Sika®-Tramex meter, CM - measurement or Oven-dry-method. No rising moisture according to ASTM (Polyethylene-sheet).		
Applied product ready for use	<b>Temperature</b>	<b>Foot traffic</b>	<b>Light traffic</b>
	+10 °C	~24 hours	~3 days
	+20 °C	~12 hours	~2 days
	+30 °C	~5 hours	~1 day
Times are approximate and will be affected by changing ambient conditions particularly temperature and relative humidity			

## PRODUCT INFORMATION

Packaging	Refer to the individual Product Data Sheets
Shelf life	Refer to the individual Product Data Sheets
Storage conditions	Refer to the individual Product Data Sheets

## BASIS OF PRODUCT DATA

All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

## FURTHER INFORMATION

- Sika® Method Statement: Sikafloor®-Cleaning Regime
- Sika® Method Statement: Mixing & Applications of Flooring Systems
- Sika® Method Statement: Evaluation and Preparation of Surfaces for Flooring Systems
- Individual Product Data Sheets within the flooring system

## IMPORTANT CONSIDERATIONS

- Freshly applied Sikafloor® products must be protected from damp, condensation and water for at least 24 hours.
- Uncured material reacts in contact with water (foaming).
- During application care must be taken that no sweat drops onto the fresh Sikafloor® products. Wear head and wrist bands.
- For exact colour matching, ensure the Sikafloor® product in each area is applied from the same control batch numbers.
- If temporary heating is required do not use gas, oil, paraffin or other fossil fuel heaters, these produce large quantities of both CO<sub>2</sub> and H<sub>2</sub>O water vapour, which may adversely affect the finish. For heating use only electric powered warm air blower systems.

## ECOLOGY, HEALTH AND SAFETY

For information and advice on the safe handling, storage and disposal of chemical products, users shall refer to the most recent Safety Data Sheet (SDS) containing physical, ecological, toxicological and other safety-related data.

### CLEANING

Refer to Sika® Method Statement: Sikafloor®-Cleaning Regime

### LOCAL RESTRICTIONS

Please note that as a result of specific local regulations the declared data for this product may vary from country to country. Please consult the local Product Data Sheet for the exact product data.

### LEGAL NOTES

Any information or suggestions for use concerning Sika's products, which we either in writing or orally have given buyers or end-users of the product, have been given in good faith based on our own experiences and based on approved praxis and the technological and scientific knowledge on the time of giving such suggestions and information, which are given without any type of guarantees, and which do not lead to any further responsibility from Sika Danmark A/S, besides what is stated in the sales agreement in question. The buyer or end-user should themselves investigate or otherwise make sure, that our products are suitable for the use in question and further make sure that the products are kept and used correct and in agreement with the published rules and considering the actual conditions in order to avoid damages or less satisfactory results. Any order is accepted and any deliverance is affected according to the general terms of sales and delivery from Sika Danmark A/S, which are considered known and accepted, and which could be handed out when asked for. Our catalogues are not up-dated automatically. The present product data sheet is only for use in Denmark. Values stated in the present product data sheet should be seen as recommended, unless stated otherwise.

#### Sika Danmark A/S

Hirsemarken 5  
3520 Farum  
Tlf. +45 48 18 85 85  
www.sika.dk



#### SYSTEM DATA SHEET

Sikafloor® MultiFlex PB-57 UV  
June 2021, Version 01.01  
02081290000000070

SikafloorMultiFlexPB-57UV-en-DK-(06-2021)-1-1.pdf