

# Sikagard<sup>®</sup>-705 L

## DECLARATION OF PERFORMANCE

### No. 0203030100100000041105

|    |                                                        |                                                                                                                                                                  |
|----|--------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1  | <b>UNIQUE IDENTIFICATION CODE OF THE PRODUCT-TYPE:</b> | 0203030100100000041105                                                                                                                                           |
| 2  | <b>INTENDED USE/S</b>                                  | EN 1504-2:2004<br>Surface protection product – hydrophobic impregnation:<br>ingress protection (1.1),<br>moisture control (2.1),<br>increasing resistivity (8.1) |
| 3  | <b>MANUFACTURER:</b>                                   | Sika Services AG<br>Tüffenwies 16-22<br>8064 Zürich                                                                                                              |
| 4  | <b>AUTHORISED REPRESENTATIVE:</b>                      |                                                                                                                                                                  |
| 5  | <b>SYSTEM/S OF AVCP:</b>                               | System 2+                                                                                                                                                        |
| 6a | <b>HARMONISED STANDARD:</b>                            | EN 1504-2:2004                                                                                                                                                   |
|    | Notified body/ies:                                     | 0921                                                                                                                                                             |

## 7 DECLARED PERFORMANCE/S


| Essential Characteristics                  | Performance                                  | AVCP      | Harmonised Technical Specification |
|--------------------------------------------|----------------------------------------------|-----------|------------------------------------|
| Depth of penetration                       | Class II: $\geq 10$ mm                       | System 2+ | EN 1504-2:2004                     |
| Water absorption and resistance to alkali  |                                              |           |                                    |
| Absorption ratio:                          | < 7.5 % compared with the untreated specimen | System 2+ |                                    |
| Absorption ratio:                          | < 10 % after immersion in alkali solution    | System 2+ |                                    |
| Drying rate for hydrophobic impregnation   | Class I: > 30 %                              | System 2+ |                                    |
| Loss of mass after freeze-thaw salt stress | Pass                                         | System 2+ |                                    |
| Dangerous substances                       | NPD                                          | System 2+ |                                    |
|                                            |                                              |           |                                    |

## 8 APPROPRIATE TECHNICAL DOCUMENTATION AND/OR - SPECIFIC TECHNICAL DOCUMENTATION

The performance of the product identified above is in conformity with the set of declared performance/s. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.

Signed for and on behalf of the manufacturer by:

Name: Anders Beier  
Function: General Manager  
At Farum on February 17<sup>th</sup> 2021

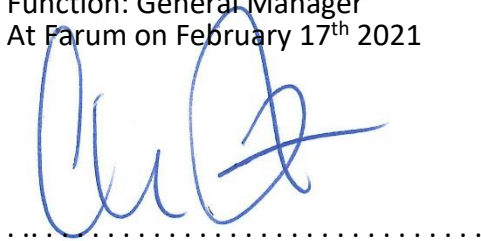

Name: Lasse Jakobsen  
Function: Senior Technical Manager  
At Farum on February 17<sup>th</sup> 2021



End of information as required by Regulation (EU) No 305/2011



08

Sika Services AG, Zurich, Switzerland

DoP No. 0203030100100000041105

EN 1504-2:2004

Notified Body 0921

Surface protection product – hydrophobic impregnation: ingress protection (1.1), moisture control (2.1), increasing resistivity (8.1)

|                                            |                                                |
|--------------------------------------------|------------------------------------------------|
| Depth of penetration                       | Class II: $\geq 10$ mm                         |
| Water absorption and resistance to alkali  |                                                |
| Absorption ratio:                          | $< 7.5$ % compared with the untreated specimen |
| Absorption ratio:                          | $< 10$ % after immersion in alkali solution    |
| Drying rate for hydrophobic impregnation   | Class I: $> 30$ %                              |
| Loss of mass after freeze-thaw salt stress | Pass                                           |

<http://dop.sika.com>

## ECOLOGY, HEALTH AND SAFETY INFORMATION (REACH)

For information and advice on the safe handling, storage and disposal of chemical products, users shall refer to the most recent Safety Data Sheet (SDS) containing physical, ecological, toxicological and other safety related data.

## LEGAL NOTE

Any information or suggestions for use concerning Sika's products, which we either in writing or orally have given buyers or end-users of the product have been given in good faith based on our own experiences and based on approved praxis and the technological and scientific knowledge on the time of giving such suggestions and information, which are given without any type of guarantees, and which do not lead to any further responsibility from Sika Danmark A/S, besides what is stated in the sales agreement in question. The buyer or end-user should themselves investigate or otherwise make sure that our products are suitable for the use in question and further make sure that the products are kept and used correct and in agreement with the published rules and considering the actual conditions in order to avoid damages or less satisfactory results. Any order is accepted and any deliverance is affected according to the general terms of sales and delivery from Sika Danmark A/S, which are considered known and accepted, and which could be handed out when asked for. Our catalogues are not up-dated automatically. The present product data sheet is only for use in Denmark. Values stated in the present product data sheet should be seen as recommended, unless stated otherwise

**Declaration of Performance**  
Sikagard®-705 L  
0203030100100000041105  
2021.02 , ver. 1  
1105

Template for translation. Only for  
internal use

**Sika Danmark A/S**  
Hirsemarken 5  
DK-3520 Farum  
Denmark  
[www.sika.dk](http://www.sika.dk)

**Declaration of Performance**  
Sikagard®-705 L  
0203030100100000041105  
2021.02 , ver. 1  
1105

**4/4**

Template for translation. Only for  
internal use

**BUILDING TRUST**

