

Sikafloor®-2510 W

Declaration of Performance No 22926112

1	Unique identification code of the product-type:	22926112
2	Intended use/es:	For internal uses subject to reaction to fire regulations — Synthetic resin screed material All other uses — Synthetic resin screed material
3	Manufacturer:	Sika Services AG Tüffenwies 16 8064 Zürich Switzerland
5	System/s of AVCP:	System 3 (For internal uses subject to reaction to fire regulations) System 4 (All other uses)
6a	Harmonised standard:	EN 13813:2002
	Notified body/ies:	1611

Declaration of Performance

Sikafloor®-2510 W

22926112

07/02/2024 2

1008

7 Declared performance/s:			
Essential Characteristics	Performance		AVCP
			Harmonised Technical Specification
Reaction to fire	Class B _{fl} -s1		System 3
Release of corrosive substances	NPD		System 4
Water permeability	NPD		System 4
Mechanical resistance	Wear resistance	AR0,5	System 4
	Bond strength	B2,0	
	Impact resistance	IR4	
Sound insulation	NPD		System 4
Sound absorption	NPD		System 4
Thermal resistance	NPD		System 4
Chemical resistance	NPD		System 4

EN 13813:2002

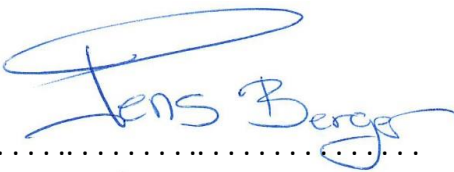
The performance of the product identified above is in conformity with the set of declared performance/s. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.

Signed for and on behalf of the manufacturer by:

Name: Anders Beier
Function: General Manager
At Farum on 26 February 2024


.....

Name: Jens Berger
Function: Head Specialized Applicators
At Farum on 26 February 2024


.....

End of information as required by Regulation (EU) No 305/2011 of the European Parliament and of the Council of 9 March 2011 laying down harmonised conditions for the marketing of construction products and repealing Council Directive 89/106/EEC Text with EEA relevance

Declaration of Performance

Sikafloor®-2510 W

22926112

07/02/2024 2

1008

Sika Services AG, Zürich, Switzerland

22926112

Reaction to fire	Class B _{fl} -s1	
Mechanical resistance	Wear resistance	AR0,5
	Bond strength	B2,0
	Impact resistance	IR4
EN 13813:2002		
1611		
For internal uses subject to reaction to fire regulations — Synthetic resin screed material All other uses — Synthetic resin screed material		

<http://dop.sika.com>

For information and advice on the safe handling, storage and use of this product, users shall refer to the most recent Product Data Sheet (PDS).

[illegible]

Sika Danmark A/S
Hirsemarken 5
DK-3520 Farum
Denmark

Telefon +45 48 18 85 85
www.sika.dk

Sikafloor®-2510 W
22926112
07/02/2024 2
1008

