

SYSTEM DATA SHEET

Sika ComfortFloor® PS-64 N

Sound-dampening, soft, low-VOC, polyurethane flooring system with optional decorative top layer

DESCRIPTION

Sika ComfortFloor® PS-64 N is an aesthetic, elastic, low-VOC polyurethane flooring system with an optional decorative top layer and a sound-dampening layer. The System is part of the Sika Comfortfloor® decorative flooring range.

USES

Sika ComfortFloor® PS-64 N may only be used by experienced professionals.

Sika® ComfortFloor® PS-64 N is used in the following commercial and public buildings and areas:

- Airports
- Schools and universities
- Healthcare facilities and hospitals
- Residential areas and homes

Please note:

- The System may only be used by experienced professionals.
- The System may only be used for interior applications.

FEATURES

- Good mechanical resistance
- Highly flexible
- Low maintenance
- No shrinkage after curing
- Low VOC emissions
- Reduces footfall sound and contact noise
- Good resistance to UV exposure
- Soft underfoot


CERTIFICATES AND TEST REPORTS

- Sound insulation Sika ComfortFloor®PS-63N/64N, puetz, No. A 4076-2E-RA-001
- Reaction to fire EN 13501-1, GHENT, Report No.CR 21-0868-01

SYSTEM INFORMATION

System structure

Sika ComfortFloor® PS-64 N

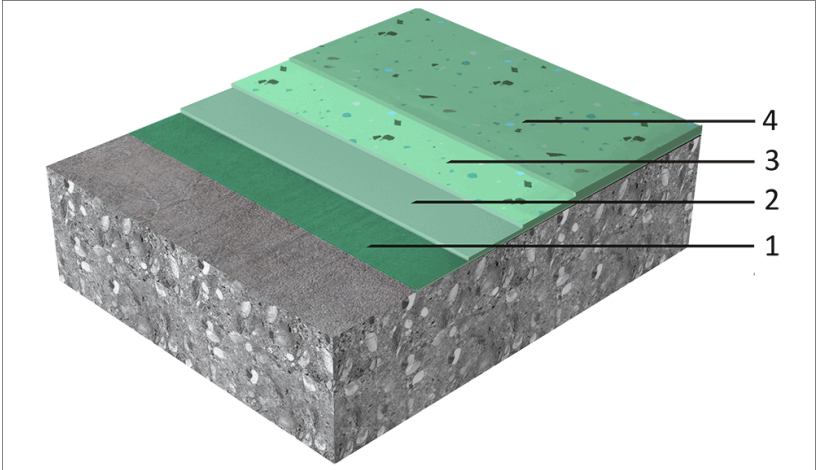

Layer	Product
1. Primer	Sikafloor®-150 Sikafloor®-151 Sikafloor®-1590 Contact Sika Technical Service for information on choosing the right primer for your project.
2. Acoustic layer	Sikafloor®-320 N
3. Wearing layer	Sikafloor®-3000 (Unicolour) Sikafloor®-3000 FX (Marble effect)
4. Top coat	Sikafloor®-304 W Sikafloor®-304 W Matt

Composition	Polyurethane
Appearance	Smooth, matt finish
Colour	Available in almost unlimited range of colour shades
Nominal thickness	~6 mm

TECHNICAL INFORMATION

Shore A hardness	Cured 14 days at +23 °C	~84	(EN ISO 868)
Castor chair resistance	No damage (25 000 cycles)		(EN 425)
Tensile adhesion strength	> 1.5 N/mm²		(EN 1542)
Reaction to fire	Class C _{fl} -s1		(EN 13501-1)
Chemical resistance	Laboratory-defined resistance to many individual chemicals. Before proceeding, contact Sika Technical Service for specific information.		(Requires chemical resistance chart in EDMS)
Sound insulation	2 mm accoustic layer thickness	ΔL _w =12 dB	(ISO 10140-3)
	3.5 mm accoustic layer thickness	ΔL _w =15 dB	
Indentation	0.1 mm		(EN 433)

APPLICATION INFORMATION

Consumption	Layer	Product	Consumption
	Primer	Sikafloor®-150 Sikafloor®-151 Sikafloor®-1590	1-2 × 0.3–0.5 kg/m ²
	Acoustic layer	Sikafloor®-320 N	1.25 kg/m ² per mm thickness
	Wearing layer	Sikafloor®-3000 Sikafloor®-3000 FX	2.8 kg/m ² (2 mm)
	Top coat	Sikafloor®-304 W Sikafloor®-304 W Matt	0.13–0.15 kg/m ² per layer diluted with 10 % water

Multiply the consumption of Sikafloor®-320 N with the layer thickness stated in the section Sound Insulation to achieve the desired sound dampening performance.

Note: Consumption data is theoretical and does not allow for any additional material due to surface porosity, surface profile, variations in level, wastage or any other variations. Apply the Product to a test area to calculate the exact consumption for the specific substrate conditions and proposed application equipment.

Ambient air temperature	Maximum	+30 °C
	Minimum	+15 °C

Relative air humidity	Maximum	80 % r.h.
-----------------------	---------	-----------

Dew point	Refer to the individual Product Data Sheet.	
-----------	---	--

Substrate temperature	Maximum	+30 °C
	Minimum	+15 °C

Substrate moisture content	Refer to the individual Product Data Sheet.	
----------------------------	---	--

Waiting time to overcoating	When using Sikafloor®-1590 refer to the individual Product Data Sheet for specific information on waiting time to overcoating.	
	Before applying Sikafloor®-320 N on the primer allow:	

Temperature	Minimum	Maximum
+10 °C	17 hours	4 days
+20 °C	9 hours	2 days
+30 °C	7 hours	1 day

Before applying Sikafloor®-3000 or Sikafloor®-3000 FX on the acoustic layer allow:

Temperature	Minimum	Maximum
+15 °C	24 hours	3 days
+20 °C	16 hours	48 hours
+30 °C	16 hours	36 hours

Before overcoating Sikafloor®-304 W or Sikafloor®-306 W on the wearing layer allow:

Temperature	Minimum	Maximum
+10 °C	24 hours	72 hours
+20 °C	16 hours	48 hours
+30 °C	16 hours	36 hours

Note: Times are approximate and will be affected by changing ambient conditions, particularly temperature and relative humidity.

Applied product ready for use

Temperature	Foot traffic	Light traffic	Full cure
+15 °C	30 hours	48 hours	6 days
+20 °C	16 hours	24 hours	4 days
+30 °C	12 hours	18 hours	3 days

Note: Times apply when the last layer of the system has been applied. Times are affected by changing ambient conditions, particularly temperature and relative humidity.

BASIS OF PRODUCT DATA

All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

ECOLOGY, HEALTH AND SAFETY

For information and advice on the safe handling, storage and disposal of chemical products, users shall refer to the most recent Safety Data Sheet (SDS) containing physical, ecological, toxicological and other safety-related data.

LOCAL RESTRICTIONS

Please note that as a result of specific local regulations the declared data for this product may vary from country to country. Please consult the local Product Data Sheet for the exact product data.

LEGAL NOTES

Any information or suggestions for use concerning Sika's products, which we either in writing or orally have given buyers or end-users of the product, have been given in good faith based on our own experiences and based on approved praxis and the technological and scientific knowledge on the time of giving such suggestions and information, which are given without any type of guarantees, and which do not lead to any further responsibility from Sika Danmark A/S, besides what is stated in the sales agreement in question. The buyer or end-user should themselves investigate or otherwise make sure, that our products are suitable for the use in question and further make sure that the products are kept and used correct and in agreement with the published rules and considering the actual conditions in order to avoid damages or less satisfactory results. Any order is accepted and any deliverance is affected according to the general terms of sales and delivery from Sika Danmark A/S, which are considered known and accepted, and which could be handed out when asked for. Our catalogues are not up-dated automatically. The present product data sheet is only for use in Denmark. Values stated in the present product data sheet should be seen as recommended, unless stated otherwise.

Sika Danmark A/S

Hirsemarken 5
3520 Farum
Tlf. +45 48 18 85 85
www.sika.dk



SYSTEM DATA SHEET

Sika ComfortFloor® PS-64 N
March 2025, Version 03.01
020812900010000002

SikaComfortFloorPS-64N-en-DK-(03-2025)-3-1.pdf