

## PRODUCT DATA SHEET

# Sikaflex®-953 L30

Long open time, fast-curing, 2-component STP assembly adhesive / sealant

**TYPICAL PRODUCT DATA (FURTHER VALUES SEE SAFETY DATA SHEET)**

Properties	Sikaflex®-953 L30 A	Sikaflex®-905 B
Chemical base	2-component silane terminated polymer (STP)	
Color (CQP001-1)	White	white
Density (uncured)	1.41 kg/l	1.20 kg/l
	mixed	1.39 kg/l
Mixing ratio	A:B by volume	10 : 1
	A:B by weight	11.7 : 1
Non-sag properties (CQP061-1)	Fair	
Application temperature	product, ambient	5 – 40 °C
Skin time (CQP019-1)	40 minutes <sup>A</sup>	
Open time (CQP526-1)	30 minutes <sup>A</sup>	
Curing speed (CQP046-1)	(see table) <sup>A</sup>	
Shrinkage (CQP014-1)	2 %	
Shore A hardness (CQP023-1 / ISO 48-4)	50	
Tensile strength (CQP036-1 / ISO 527)	2.5 MPa	
Elongation at break (CQP036-1 / ISO 527)	450 %	
Tear propagation resistance (CQP045-1 / ISO 34)	15 N/mm	
Tensile lap-shear strength (CQP046-1 / ISO 4587)	1.5 MPa	
Thermal resistance (CQP 513-1)	1 hour	160 °C
Service temperature (CQP513-1)	-45 – 90 °C	
Shelf life (CQP016-1)	9 months <sup>B</sup>	
Mixer	for dispensing systems	Statomix® MS 13-18-G

CQP = Corporate Quality Procedure

<sup>A</sup>) 23 °C / 50 % r. h.<sup>B</sup>) storage between 5 and 25 °C, comp. (B) is frost sensitive
**DESCRIPTION**

Sikaflex®-953 L30 is a 2-component Silane Terminated Polymer (STP) assembly adhesive which cures by chemical reaction of the two components. The L30 version is designed for bonding large components where a longer open time is required.

Owing to its good weathering resistance and gap-filling performance it can also be used for exterior sealing joints. It is as well suitable where pumping over a long distance is required.

**PRODUCT BENEFITS**

- Pumpable over long distances
- Minimal pre-treatment required for most common substrates
- Solvent- and isocyanate-free
- Good gap-filling capabilities
- Great weathering and ageing resistance

**AREAS OF APPLICATION**

Sikaflex®-953 L30 is suitable for bonding large components exposed to dynamic stress and where the attainment of early strength is required. Common substrates are metals, particularly aluminum (including anodized), steel (including phosphated, chromated, galvanized), metal primers and paint coatings (2-part systems), ceramic materials and plastics. Seek manufacturer's advice and perform tests on original substrates before using Sikaflex®-953 L30 on materials prone to stress cracking. This product is suitable for experienced professional users only. Tests with actual substrates and conditions have to be performed ensuring adhesion and material compatibility.

**PRODUCT DATA SHEET**

Sikaflex®-953 L30

Version 03.01 (11 - 2022), en\_DK  
012301219530001200

## CURE MECHANISM

The curing of Sikaflex®-953 L30 takes place by chemical reaction of the two components.

Time [h]	Strength [MPa]
2	0.2
4	0.6
6	0.8

Table 1: Lap-shear strength (CQP 046-1) at 23 °C / 50 % r.h.

## CHEMICAL RESISTANCE

Sikaflex®-953 L30 is generally resistant to fresh water, seawater, diluted acids and diluted caustic solutions; temporarily resistant to fuels, mineral oils, vegetable and animal fats and oils; not resistant to organic acids, glycolic alcohol, concentrated mineral acids and caustic solutions or solvents.

## METHOD OF APPLICATION

### Surface preparation

Surfaces must be clean, dry and free from grease, oil, dust and contaminants. Surface treatment depends on the specific nature of the substrates and is crucial for a long lasting bond.

All pre-treatment steps must be confirmed by preliminary tests on original substrates considering specific conditions in the assembly process.

### Application

Sikaflex®-953 L30 can be processed by cartridge or with a suitable dispensing system. The mixer type needs to be respected. For dispensing systems the mixer type is stated in the Typical Product Data table, whereas for cartridges it is stated under Packaging Information.

Sikaflex®-953 L30 can be applied between 5 °C and 40 °C but changes in reactivity and application properties have to be considered. The optimum temperature for substrate and the Product is between 15 °C and 25 °C.

To ensure a uniform thickness of the bondline it is recommended to apply the adhesive in form of a triangular bead (see figure 1).

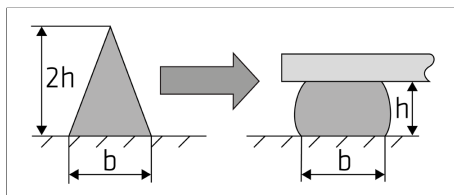


Figure 1: Recommended bead configuration

The open time is significantly shorter in hot and humid climate. The parts must always be joint within the open time. As a rule of thumb, a change of + 10 °C reduces the open time by half.

For advice on selecting and setting up a suitable pump system, contact the System Engineering Department of Sika Industry.

## Tooling and finishing

Tooling and finishing must be carried out within the open time of the adhesive. We recommend the use of Sika® Tooling Agent N. Other finishing agents must be tested for suitability and compatibility.

## Removal

Uncured Sikaflex®-953 L30 can be removed from tools and equipment with Sika® Remover-208 or another suitable solvent. Once cured, the material can only be removed mechanically. Hands and exposed skin have to be washed immediately using hand wipes such as Sika® Cleaner-350H or a suitable industrial hand cleaner and water.

Do not use solvents on skin.

## Overpainting

Sikaflex®-953 L30 can be best painted within the skin formation time. If painting process takes place after the sealant has built a skin, adhesion could be improved by treating the joint surface with Sika® Aktivator-100 or Sika® Aktivator-205 prior to paint process. If the paint requires a baking process (> 80 °C), best performance is achieved by allowing the sealant to fully cure first.

All paints have to be tested by carrying preliminary trials under manufacturing conditions.

The elasticity of paints is usually lower than that of sealants. This could lead to cracking of the paint in the joint area.

## FURTHER INFORMATION

The information herein is offered for general guidance only. Advice on specific applications is available on request from the Technical Department of Sika Industry.

Copies of the following publications are available on request:

- Safety Data Sheets
  - General Guidelines
- Bonding and Sealing with 1-component Sikaflex®

## PACKAGING INFORMATION

Sikaflex®-953 L30

Dual cartridge	490 ml
Mixer: MFHX 13-18T by medmix	

Sikaflex®-953 L30 (A)

Pail	23 l
Drum	195 l

Sikaflex®-905 (B)

Pail	23 l
------	------

## BASIS OF PRODUCT DATA

All technical data stated in this document are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

## HEALTH AND SAFETY INFORMATION

For information and advice regarding transportation, handling, storage and disposal of chemical products, users shall refer to the actual Safety Data Sheets containing physical, ecological, toxicological and other safety-related data.

## DISCLAIMER

Any information or suggestions for use concerning Sika's products, which we either in writing or orally have given buyers or end-users of the product, have been given in good faith based on our own experiences and based on approved praxis and the technological and scientific knowledge on the time of giving such suggestions and information, which are given without any type of guarantees, and which do not lead to any further responsibility from Sika Danmark A/S, besides what is stated in the sales agreement in question. The buyer or end-user should themselves investigate or otherwise make sure, that our products are suitable for the use in question and further make sure that the products are kept and used correct and in agreement with the published rules and considering the actual conditions in order to avoid damages or less satisfactory results. Any order is accepted and any deliverance is affected according to the general terms of sales and delivery from Sika Danmark A/S, which are considered known and accepted, and which could be handed out when asked for. Our catalogues are not up-dated automatically. The present product data sheet is only for use in Denmark. Values stated in the present product data sheet should be seen as recommended, unless stated otherwise.

## PRODUCT DATA SHEET

Sikaflex®-953 L30  
Version 03.01 (11 - 2022), en\_DK  
012301219530001200

Sika Danmark A/S  
Hirsemarken 5  
3520 Farum  
Tlf. +45 48 18 85 85  
www.sika.dk

