

PRODUCT DATA SHEET

SikaFuko® VT-1

Re-injectable hose for sealing construction joints

DESCRIPTION

SikaFuko® VT-1 is a re-injectable hose for sealing various construction and connection joints in watertight concrete structures. To seal the joint, SikaFuko® VT-1 is injected with suitable Sika® Injection materials, such as acrylate and microfine cement suspensions (for multiple injections) or polyurethane and epoxy resins (for single injection). With the integrated 'valve techniques' the hose can be used to re-inject multiple times if necessary.

USES

- Sealing construction and connection joints
- Suitable for many different structures and construction methods where additional joint security/safety is required
- Prevents water ingress through concrete joints in the following typical structures: Water retaining or excluding structures, water reservoirs, dams, canals, sewage treatment plants, tunnels, subways, retaining walls
- As a back-up system for waterbars
- Enables testing for water leaks

PRODUCT INFORMATION

Composition	Yellow inner core	PVC
	Yellow profile strips	Neoprene based cellular rubber
	Mesh	Polyester

Packaging	Supplied as a Combi-pack in a cardboard box containing: <ul style="list-style-type: none"> ▪ 200 m SikaFuko® VT-1 ▪ 10 m green PVC-hose (inlet) ▪ 10 m white PVC-hose (outlet) ▪ Accessories (2 m connecting pipe, 4 m heat shrink sleeve , × 50 closure plugs, 1 can of glue, 1 roll of tape, × 800 fastening clips) <p>Note: All accessories including inlet and outlet PVC-hose are available separately. Refer to current price list for packaging variations.</p>
-----------	--

CHARACTERISTICS / ADVANTAGES

- Uses unique 'valve techniques' for injection
- Multiple re-injections with Sika injection acrylate resins or microfine cement suspensions
- One-time injectable with Sika injection polyurethane and epoxy resins
- Easy and secure installation
- Tested in water pressures up to 10 bar (100 m)
- External test reports for suitable injection material
- Ideal back-up system in combination with waterbars
- Long-term references on many international projects

APPROVALS / CERTIFICATES

- Water Tightness Test Report with Sika Injection-307, WISSBAU, No.2016-347
- Water Tightness Test Report with Sika Injection-306, WISSBAU, No.2002-094-01
- Injectability Test Report with Sika Injection-201 CE, MFPA Leipzig, No.PB5.1/13.520
- Water Tightness Test Report with Sika Injection-201 CE, WISSBAU, No.2008-163-1



Appearance and colour	Yellow - PVC hose core with lateral openings along the groove. A compressible neoprene strip is secured by a mesh into the groove.	
Shelf life	48 months from date of production	
Storage conditions	The product must be stored in original, unopened and undamaged sealed packaging in dry conditions at temperatures between +5 °C and +35 °C. Always refer to packaging.	
Diameter	Internal hose diameter	6 mm
	External hose diameter	13,5 mm

TECHNICAL INFORMATION

Shore A hardness	Yellow inner core	85 ±3	(DIN EN ISO 868)
	Yellow profile strips	20 ±5	
Elongation	Yellow inner core	≥ 250 %	(DIN EN ISO 527)
	Yellow profile strips	≥ 300 %	
	Mesh	≥ 30 %	

SYSTEM INFORMATION

System structure

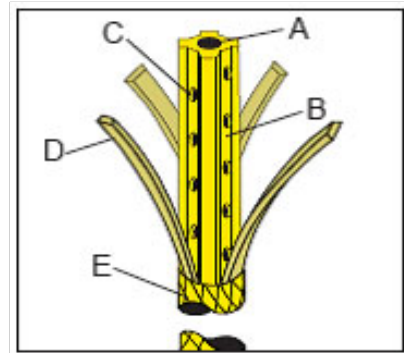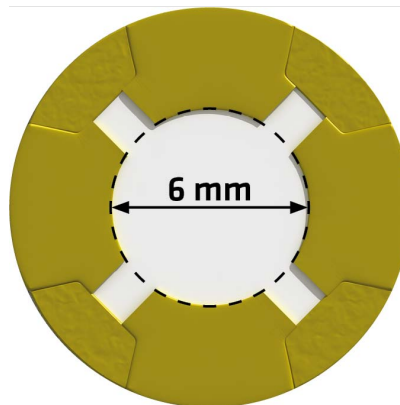

A	Injection channel
B	Solid hose core made of high quality PVC compound
C	Lateral grooves with staggered injection openings
D	Compressible neoprene profile strips (as 'valves') over the longitudinal grooves
E	Fine webbed nylon mesh for secure fixing of the neoprene profiles

BASIS OF PRODUCT DATA

All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

FURTHER INFORMATION

- Sika® Method Statement: SikaFuko® VT System

IMPORTANT CONSIDERATIONS

Installation work must only be carried out by Sika® trained, approved or competent contractors experienced in this type of application.

- Do not use SikaFuko® VT-1 for sealing expansion / movement joints.
- SikaFuko® VT-1 will only seal the joint if injected by suitable Sika® injection materials.
- Re-injection must be carried out with the tested injection materials referenced in the test reports.

ECOLOGY, HEALTH AND SAFETY

REGULATION (EC) NO 1907/2006 - REACH

This product is an article as defined in article 3 of regulation (EC) No 1907/2006 (REACH). It contains no substances which are intended to be released from the article under normal or reasonably foreseeable conditions of use. A safety data sheet following article 31 of the same regulation is not needed to bring the product to the market, to transport or to use it. For safe use follow the instructions given in this product data sheet. Based on our current knowledge, this product does not contain SVHC (substances of very high concern) as listed in Annex XIV of the REACH regulation or on the candidate list published by the European Chemicals Agency in concentrations above 0.1 % (w/w)

APPLICATION INSTRUCTIONS

SUBSTRATE PREPARATION

Concrete surface must be clean and all loose materials removed before installing hose and placing concrete.

APPLICATION METHOD / TOOLS

Reference must be made to the Sika® Method Statement: SikaFuko® VT System. Contact Sika Technical Services for additional information.

LOCAL RESTRICTIONS

Please note that as a result of specific local regulations the declared data for this product may vary from country to country. Please consult the local Product Data Sheet for the exact product data.

LEGAL NOTES

Any information or suggestions for use concerning Sika's products, which we either in writing or orally have given buyers or end-users of the product, have been given in good faith based on our own experiences and based on approved praxis and the technological and scientific knowledge on the time of giving such suggestions and information, which are given without any type of guarantees, and which do not lead to any further responsibility from Sika Danmark A/S, besides what is stated in the sales agreement in question. The buyer or end-user should themselves investigate or otherwise make sure, that our products are suitable for the use in question and further make sure that the products are kept and used correct and in agreement with the published rules and considering the actual conditions in order to avoid damages or less satisfactory results. Any order is accepted and any deliverance is affected according to the general terms of sales and delivery from Sika Danmark A/S, which are considered known and accepted, and which could be handed out when asked for. Our catalogues are not up-dated automatically. The present product data sheet is only for use in Denmark. Values stated in the present product data sheet should be seen as recommended, unless stated otherwise.

Sika Danmark A/S
Hirsemarken 5
3520 Farum
Tlf. +45 48 18 85 85
www.sika.dk



PRODUCT DATA SHEET
SikaFuko® VT-1
April 2022, Version 01.01
020707100010000001

SikaFukoVT-1-en-DK-(04-2022)-1-1.pdf